



T116C 产品说明书 Product Manual

1、包装清单 Packing List

配件 accessory	安装支架 1 个; 螺钉 2 个; 合格证 1 个; 保修卡 1 个; Installation bracket*1; Screw*2; Certificate of conformity*1; Warranty card*1;
彩盒 Color box	飞机盒+珍珠棉内托 Aircraft box + Pearl cotton inner tray
卡通箱 Carton box	一箱 10 台 10 units per box

2、外观说明 Appearance

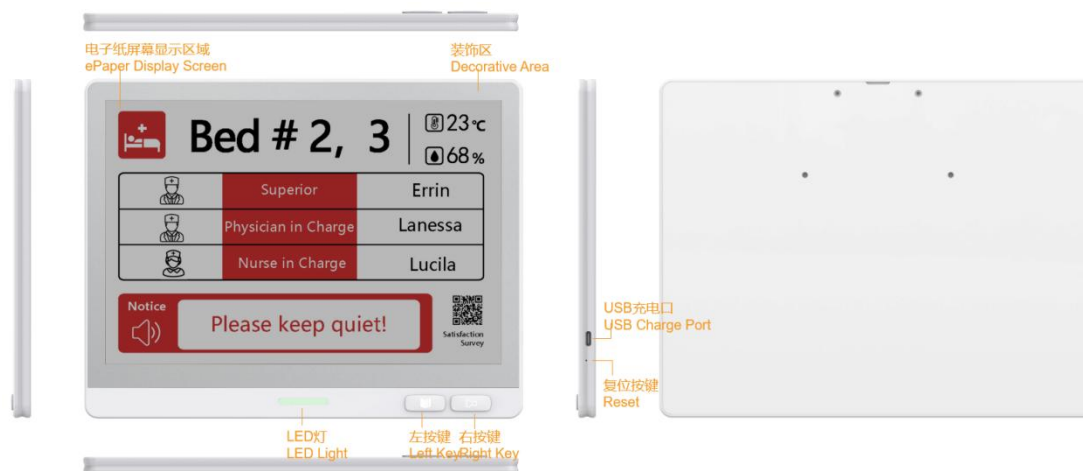

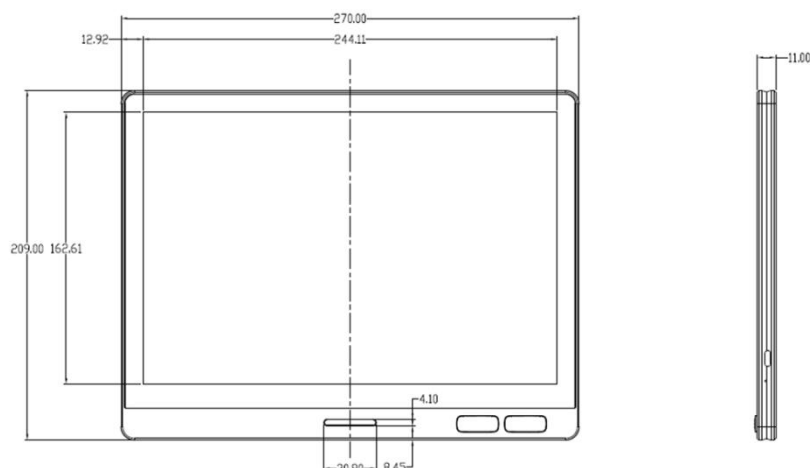

3、产品规格 Product Specifications

需求 Requirement	需求项 Items	详情 Details
结构外观 Appearance & Structure	整机尺寸 Outer dimension	270*209*11mm
	整机重量 Weight	648g
	产品外观 Case color	雅致白色（可根据需求定制不同颜色外壳） Elegant white (different color shells can be customized according to needs)
	材质 Material	PC+ABS
	按键 Key	左按键：短按指示 LED 灯状态，亮 3s；长按刷 MAC 地址条形码； Left button: Short press to light on LED for 3 second indicating different status; Long press to update MAC address bar-code; 右按键：指示灯循环切换 Right button: the LED light on color by color
	接口 Interface	USB Type-C 充电口 USB Type-C for charging
硬件参数 Hardware parameters	指示灯 LED	1 个红绿蓝三色灯，充电时亮红灯，充满灭灯 RGB LED*1. The red light will turn on when charging and turn off when fully charged
	显示屏 Display screen	11.6 寸，黑白红三色电子纸 11.6inch , black/white/red EPD
	分辨率 Resolution	960*640


	DPI	100
	前光 Front light	Not Supported
	电池 Battery	可充电锂电池 2000mAh; 充电时间 2 小时; 10 个月 (刷新 10 次/天); 如长期不用建议每半年充电 1 次 Li-On rechargeable :2000mAh; Charging time: 2 hours; Battery life: 10 months (refresh 10 times per day); It is recommended to charge once every six months if not used for a long time.
	WIFI	Supported
	BLUETOOTH	Not Supported
	NFC	Not Supported
	工作/存储温度 Working/Storage temperature	0°C~40°C
	工作/存储湿度 Working/Storage humidity	45%~70%
	软件功能 Software function	短按 LED 灯亮 3s, 不同颜色指示设备不同状态; Short press to light on LED for 3 second indicating different status; - 红灯: 未联网; Red: offline - 绿灯: 联网中; Green: connecting to the network - 蓝灯: 已连接服务器; Blue: online - 黄灯: AP 热点配置模式; Yellow: AP hotspot configuration mode 长按刷 MAC 地址条形码; Long press to update MAC address bar-code;
	左按键 Left button	短按 LED 灯亮 3s, 不同颜色指示设备不同状态; Short press to light on LED for 3 second indicating different status;
	右按键 Right button	指示灯循环切换 the LED light on color by color: Red, green, blue, yellow(red&green), purple(red&blue), cyan(green&blue), white(red&green&blue)
	刷图方式 Updating mode	设备连接路由器并通过路由器直接连平台, 电脑操控进行 WIFI 传图; The device is connected to the platform by a router, and the computer is operated to transmit images;
	远程控制 Remote control	1、三色 LED 灯的亮灯颜色及时长支持后台指令控制, 相关指令支持接口开放; The RGB LED light can be controlled by cloud platform, and related commands support interface opening; 2、远程升级 Remote Upgrade

服务器操作系统 Server operating system	Windows 10, Linux
云服务器 Cloud server	支持 Supported

4、结构安装图 Installation Drawing


挂墙支架结构图如下：

The structural diagram of the wall bracket is as follows:

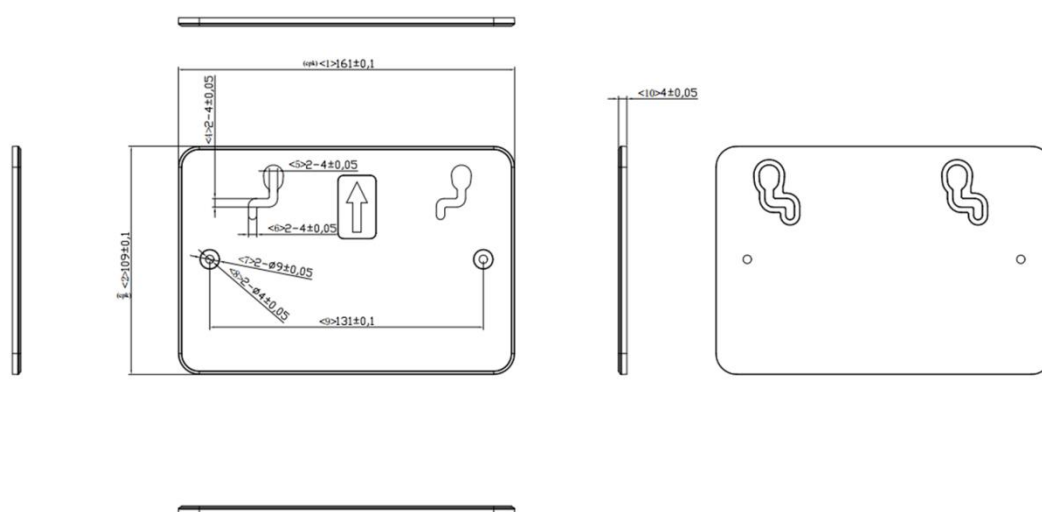

挂墙支架固定及设备安装过程如下：

The process of fixing wall brackets and installing equipment is as follows:

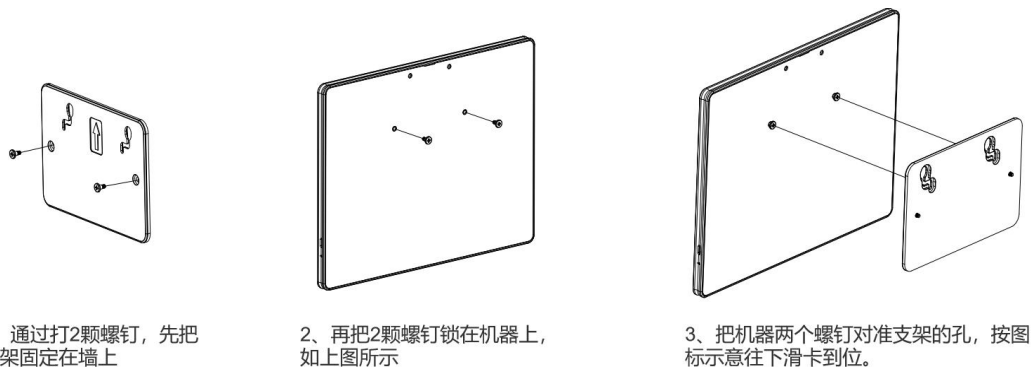

1、通过打2颗螺钉，先把支架固定在墙上

2、再把2颗螺钉锁在机器上，如上图所示

3、把机器两个螺钉对准支架的孔，按图标示意往下滑卡到位。

注意：支架固定的螺钉需自行准备，螺钉规格：KA 3.5*25mm 或 PA3.5*25mm。

Attention: The screws for fixing the bracket need to be prepared by yourself, with screw specifications of KA3.5 * 25mm or PA3.5 * 25mm.

5、使用注意事项 Precautions for Use

- 1) 产品轻拿轻放，存储温度在-25℃~50℃，工作温度在 0℃~40℃；

Handle the product with care, store at -25 °C~50 °C, and operate at 0 °C~40 °C;

- 2) 产品表面勿与硬物碰刮，使用后可以干布对产品表面进行清洁；

Do not touch or scratch the surface of the product with hard objects. After use, clean the surface of the product with a dry cloth;

- 3) 在平时使用时要防止暴晒、防止受潮、防止化学液体侵蚀、避免与金属等锐利物品接触碰撞等情况发生；

During normal use, it is important to prevent exposure to sunlight, moisture, chemical erosion, and collision with sharp objects such as metals;

- 4) 拿取产品时，避免手指直接捏拿屏幕，防止静电对屏幕造成损坏；

When taking the product, avoid directly pinching the screen with your fingers to prevent static electricity from damaging the screen;